

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮



Accessories



1 Clip on plate no slot, easy disassemble
快拆挂片 (无需开槽, 容易拆卸)



2 L type plate need to slot better loading
L形挂片 (需要开槽, 承重更强)



3 Glass clamp used glass door
玻璃夹 (适用于玻璃门)




4 Stopper used wooden door
止摆器 (适用于木门)



5 Stopper used glass door
止摆器 (适用于玻璃门)



6 Stir button without punching the hole
波动扣 (免打孔)

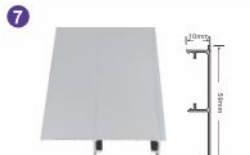

7 Top mounting decoration cover
顶装装饰盖 (可选配)



8 Side mounting decoration cover
侧装装饰盖 (可选配)



9 Hanger
侧装吊码



10 Convex wheel 凸轮



11 Concave wheel 凹轮



12 Bevel wheel 斜边轮



13 Head
封头



14 Rail with convex wheel (Option)
凸轮轨道 (选配)



15 Rail with concave wheel (Option)
凹轮轨道 (选配)



16 Rail with bevel wheel (Option)
斜边轮轨道 (选配)



17 Head
封头

Sliding Roller Series

移门轮系列

Pocket Sliding Door System 口袋门系统

Material: Zinc Alloy Body+Plastic+ Aluminum cover
Finish: Body: Metal epoxy paint
Aluminum cover: Oxidation
Parameters: Door thickness: 30-45MM

主要材质: 锌合金主体+塑料, 表面铝外壳
表面处理: 锌合金: 金属环氧漆
铝壳: 氧化
安装参数: 适用门厚: 30-45mm

M75G

Min Door Width: 560MM
Loading: 60kg/90kg
最小门宽: 560mm
产品承重: 60KG/90kg

M70A

Min Door Width: 530MM
Loading: 80kg
最小门宽: 530mm
产品承重: 80kg



AL001

Material: Aluminum Alloy
Finish: Matt Black/Lead Gray
Door thickness: 40/45mm
Size: 150/240*40*40/45mm

主要材质: 铝合金
表面处理: 哑黑和铅灰
适用门厚: 40/45mm
产品尺寸: 150/240*40*40/45mm




Sliding Door



Pocket Door

Handle slot size

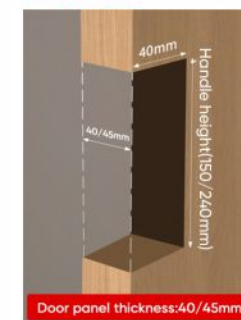

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

M71G

Material: Zinc Alloy Body+Plastic+Aluminum cover
Finish: Body: Metal epoxy paint
Aluminum cover: Oxidation
Parameters: Door thickness: 30-45MM
Min Door Width: 580MM
Loading: 80kg Customized: 120kg

主要材质: 锌合金主体+塑料, 表面铝外壳
表面处理: 锌合金: 金属环氧漆
铝壳: 氧化
安装参数: 适用门厚: 30-45mm
最小门宽: 580mm
产品承重: 80KG 可定制120KG



M46A

Material: Zinc Alloy Body+Plastic+ Aluminum cover
Finish: Body: Metal epoxy paint
Aluminum cover: Oxidation
Parameters: Door thickness: 30-45MM
Min Door Width: 560MM
Loading: 60kg/90kg

主要材质: 锌合金主体+塑料, 表面铝外壳
表面处理: 锌合金: 金属环氧漆
铝壳: 氧化
安装参数: 适用门厚: 30-45mm
最小门宽: 560mm
产品承重: 60KG/90kg



Sliding Roller Series

移门轮系列


Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

BS01

Material: Steel+Plastic
Finish: Nickel+Grey
Loading: 20Kg/Door
Width per Door: 450-1000mm
Maximum Door Height: 1 600mm
Door Thickness: 1 8/20/22mm
Door Height Should Not Above 1 200mm
If Door Width Is Lower Than 550mm

主要材质: 铁+塑料
表面处理: 镀锌/灰色
单门承重: 20kg
单扇门宽: 450-1000mm
最大门高: 1600mm
门板厚度: 18/20/22mm
门宽小于550mm时,
最大门高不超过1200mm

Accessories Details 配件明细

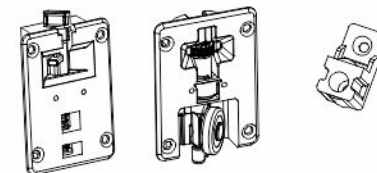

Up guide wheelx4
上导向轮x4

Down guide wheelx4
下导向轮x4

Location device x2
定位码x2



Gasketx16
垫片x16




External Solid Wood Sliding Door System 外挂门系统


M970

Material: Cold Rolled Steel/Galvanized sheet
Finish: Zinc
Door thickness: 20/25mm
Loading: 50KG


主要材质: 铁(镀锌板)
表面处理: 镀锌
适用门厚: 20/25mm
承重: 50KG



Decorative cover
装饰盖



Upper track
上轨



Down track
下轨





More products here

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

M940D Double soft close on one side 单只双缓冲

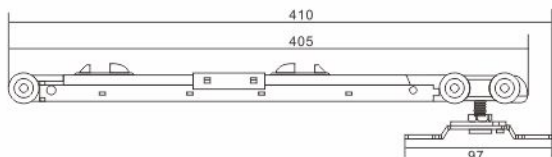

Stir button adjustment




① 拨动扣件距离=210mm (固定参数)
The margin (Fixed value) between the stir button and rail end is 210mm

② 拨动扣件距离=实际门宽-550mm+245mm
The margin (variable value) between the stir button and rail end=door width-550mm+245mm

最小门宽度 550mm

Min550mm

Material: Zinc alloy, Plastic
Loading: 45-60KG
Applicable scope: all kinds of solid wood door hanger/partition hanging door etc.
主要材质: 锌合金、塑料
承重: 45-60KG
适用范围: 各种实木吊门/隔断吊门等



Clip on


Temax®
FURNITURE HARDWARE

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

产品结构图:
Product structure drawing:

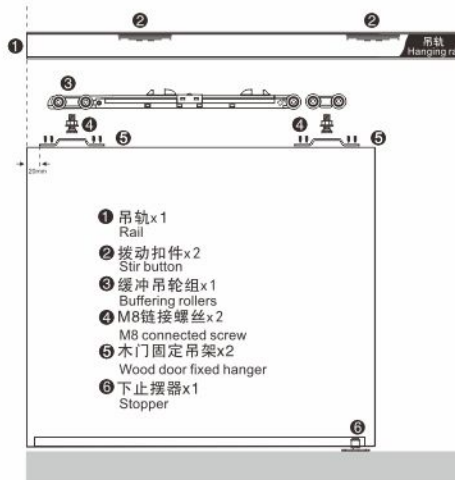

铝材功能展示图:
The Aluminum rail function display pic:




吊轨选择加工:
Rail's selection and process:




1. 先根据木门的重量衡量, 然后把上吊轨固定螺丝距定位钻孔。
Position, drill and fix the screw on the upper rail after measurement (according to the door weight)

(顶装式) Top mounted

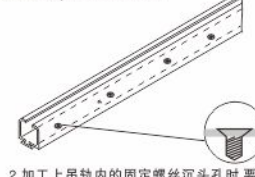

2. 加工上吊轨内的固定螺丝沉头孔时, 要注意钉头必须与吊轨的表面齐平或低于。
When process the screw nail head inside of the rail; Ensure the nail head no higher than the rail surface

(侧装式) side mounted



3. 侧装方案:
如选择本公司的侧装吊架, 作门框外侧装方案, 吊轨就不需要作钻孔加工。
Side-mounted solutions
If choose our company's side mounted hanger, then no processing on the rail again

木门选择加工:
Wood door selection and process:



门高=门洞-60mm
Door height=Doorway-60mm



门宽度≥550mm
door width≥550mm
门宽=吊轨/2+35mm
door width=rail/2+35mm



门体正面
door positive
注: 门顶两端的吊架需按图尺寸安装才能与缓冲扣完美配合。
Note: The two top ends of the door should be installed as the pic shoes, otherwise, the buffering effect will not be so perfect.



More products here

Sliding Roller Series



移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

M981D Double soft close on one side 单只双缓冲



Material: Zinc alloy, Plastic
Loading: 65-80KG
Applicable scope: all kinds of solid wood door hanger/partition hanging door etc.
主要材质: 锌合金、塑料
承重: 65-80KG
适用范围: 各种实木吊门/隔断吊门等

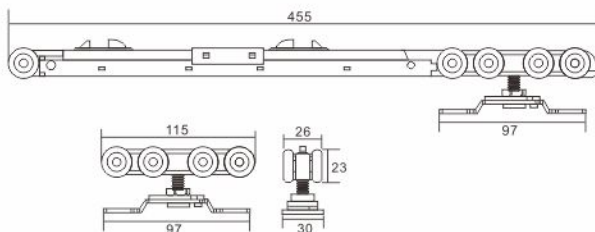

Stir button adjustment



① 拨动扣件距离= 235mm (固定参数)
The margin (Fixed value) between the stir button and rail end is 235mm

② 拨动扣件距离=实际门宽-600mm+270mm
The margin (variable value) between the stir button and rail end=door width-600mm+270mm

最小门宽度 600mm

Min600mm

Temax®
FURNITURE HARDWARE

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

产品结构图:
Product structure drawing:



- 1 吊轨x1
Rail
- 2 拨动扣件x2
Stir button
- 3 缓冲吊轮组x1
Buffering rollers
- 4 M8连接螺丝x2
M8 connected screw
- 5 木门固定吊架x2
Wood door fixed hanger
- 6 下止摆器x1
Stopper


铝材功能展示图:
The Aluminum rail function display pic:



吊轨选择加工:
Rail's selection and process:




(顶装式) Top mounted

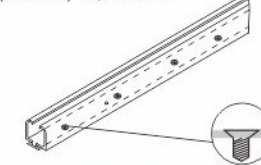

1. 先根据木门的重量衡量, 然后把上吊轨固定螺丝距定位钻孔。
Position, drill and fix the screw on the upper rail after measurement (according to the door weight)
2. 加工上吊轨内的固定螺丝沉头孔时, 要注意钉头必须与吊轨的表面齐平或低于。
When process the screw nail head inside of the rail. Ensure the nail head no higher than the rail surface



(侧装式) side mounted



3. 侧装方案:
如选择本公司的侧装吊架, 作门框外侧装方案, 吊轨就不需要作钻孔加工。
Side-mounted solutions
If choose our company's side mounted hanger, then no processing on the rail again

木门选择加工:
Wood door selection and process:

门高=门洞-60mm
Door height=Doorway-60mm

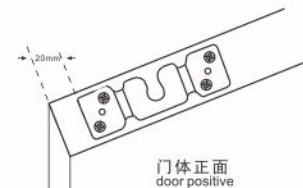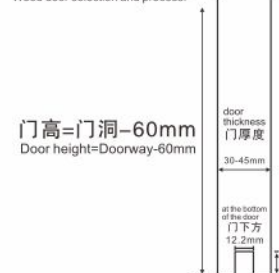

注: 门顶两端的吊架需按图尺寸安装才能与缓冲组完美配合。
Note: The two top ends of the door should be installed as the pic shows, otherwise, the buffering effect will not be so perfect




More products here

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮

M90D Double soft close on one side 单只双缓冲

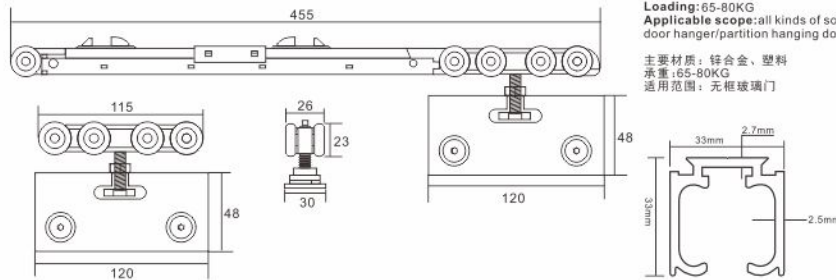

Material: Zinc alloy, Plastic
Loading: 65-80KG
Applicable scope: all kinds of solid wood door hanger/partition hanging door etc.
主要材质: 锌合金、塑料
承重: 65-80KG
适用范围: 无框玻璃门

Stir button adjustment



① 拨动扣件距离=295mm (固定参数)
 The margin (Fixed value) between the stir button and rail end is 295mm

② 拨动扣件距离=实际门宽-700mm+330mm
 The margin (variable value) between the stir button and rail end=door width-700mm+330mm

最小门宽度 700mm

Min700mm



Sliding Roller Series


移门轮系列

Hanging&Sliding Door Roller With Soft Closing Series 移门缓冲吊轮




More products here

产品结构图:
 Product structure drawing:

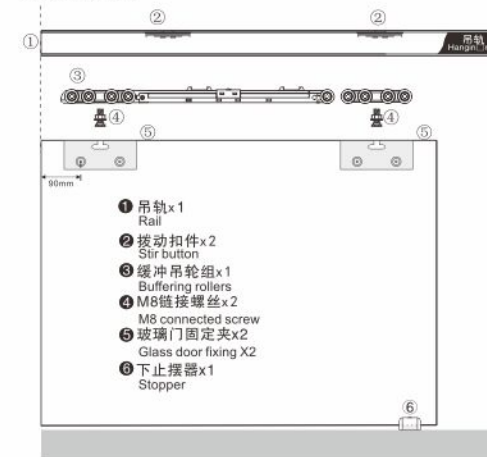


铝材功能展示图:
 The Aluminum rail function display pic:

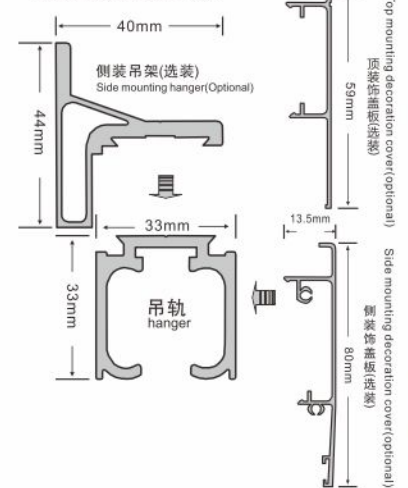

吊轨选择加工:
 Rail's selection and process:



(顶装式) Top mounted

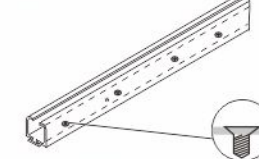


(侧装式) side mounted

玻璃门选择加工:
 Glass door selection and process:



▲ 本产品只限于10-12mm钢化安全玻璃使用
 (This product is limited to the use of 10-12mm toughened glass)

(玻璃开孔尺寸图)
 Glass hole size chart

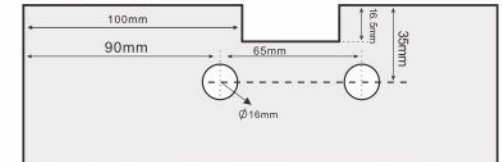

注: 按此图尺寸开孔才能与缓冲滑轮组完美配合
 Note: according to the size of the figure opening to perfect cooperation with buffer block and tackle

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller with Soft Closing Series 移门缓冲吊轮



M43G Double Soft Close on one side 单只双缓冲

Material: Zinc Alloy Body+Plastic+Aluminum cover
Finish: Body: Metal epoxy paint
Aluminum cover: Oxidation
Parameters: Door thickness: 30-45MM
Min Door Width: 600MM
Max Door Width: 1100mm
Loading: 100-120kg

主要材质: 锌合金主体+塑料, 表面铝外壳
表面处理: 锌合金: 金属环氧漆
铝壳: 氧化
安装参数: 适用门厚: 30-45mm
最小门宽: 600mm
最大门宽: 1100mm
产品承重: 100-120KG



M45G Double Soft Close on one side 单只双缓冲

Material: Zinc Alloy Body+Plastic+Aluminum cover
Finish: Body: Metal epoxy paint
Aluminum cover: Oxidation
Parameters: Door thickness: 30-45MM
Min Door Width: 600MM
Max Door Width: 1100mm
Loading: 80kg

主要材质: 锌合金主体+塑料, 表面铝外壳
表面处理: 锌合金: 金属环氧漆
铝壳: 氧化
安装参数: 适用门厚: 30-45mm
最小门宽: 600mm
最大门宽: 1100mm
产品承重: 80KG



Sliding Roller Series

移门轮系列

4 Wheels Bevel Wheel 4轮斜边轮

M42G Used For Aluminum Frame Door 用于铝框门

Loading: 45-60kg 承重: 45-60kg
Door width: ≥550mm 门宽: ≥550mm



M42G-1 Used For Aluminum Frame Door 用于铝框门



Loading: 60-80kg 承重: 60-80kg
Door width: ≥550mm 门宽: ≥550mm



More products here

Sliding Roller Series

移门轮系列

TELESCOPIC DOORS 联动门系列

M974 2+1 Double Soft Close Telescopic Sliding Door Roller
2+1联动门双向缓冲滑轮

Material: Zinc Alloy+Plastic+Steel
Surface Treatment: Metallic Black
Rated Loading: 40-60KG
Application: All kinds of solid wood door hanger/Aluminum frame door etc.

主要材质: 锌合金+塑料+铁
表面处理: 金属枪黑
承重: 40-60KG
适用范围: 各种实木吊门/铝框门等



- * Zinc Alloy Buffer, Higher Strength and Load-bearing.
- * Anti-oxidizing and Anti-Corrosion.



- * Toggle Button
- * Bottom Guide



- * Fixed door accessories



- * 3m Belt






Temax
FURNITURE HARDWARE

Sliding Roller Series

移门轮系列

TELESCOPIC DOORS 联动门系列

- * Fixed door accessories

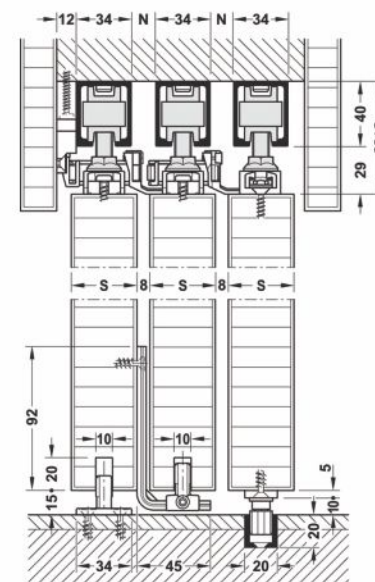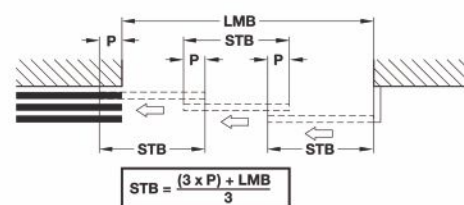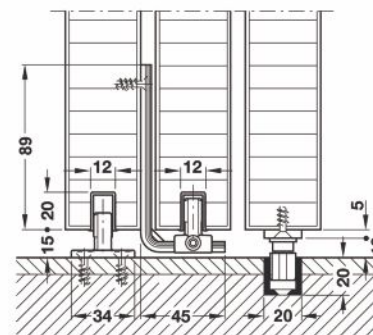

More products here

Sliding Roller Series

New Products www.shitemax.com

Sliding Roller Series

移门轮系列

TELESCOPIC DOORS 联动门系列

M975

3+1 Double Soft Close Telescopic Sliding Door Roller
3+1联动门双向缓冲滑轮

Material: Zinc Alloy+Plastic+Steel

Surface Treatment: Metallic Black

Rated Loading: 40-60KG

Application: All kinds of solid wood door hanger/Aluminum frame door etc.

主要材质: 锌合金+塑料+铁

表面处理: 金属枪黑

承重: 40-60KG

适用范围: 各种实木吊门/铝框门等



- Zinc Alloy Buffer, Higher Strength and Load-bearing.
- Anti-oxidizing and Anti-Corrosion.



- Toggle Button
- Bottom Guide



*Fixed door accessories



- 3m Belt
- Wheel*5



Sliding Roller Series

移门轮系列

TELESCOPIC DOORS 联动门系列





More products here

* Fixed door accessories



Noted: the example is the left link door.

$$\text{Door Width}(W) = \frac{\text{Door Opening Width}(L) + \text{Coincident part}(C) \times 3}{4}$$

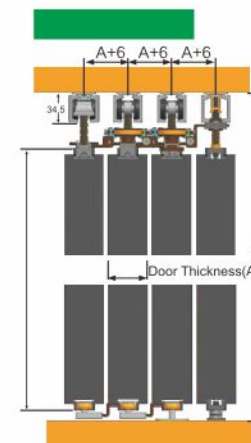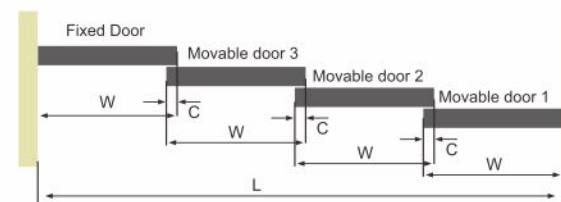

Sliding Roller Series

移门轮系列

TELESCOPIC DOORS 联动门系列

M978

2+2 Double Soft Close Opposite Sync Opening Telescopic Sliding Door Roller
2+2同步对开（反向/逆开）联动门双向缓冲滑轮

Material: Zinc Alloy+Plastic+Steel
Surface Treatment: Metallic Black
Rated Loading: 40-60KG

Application: All kinds of solid wood door hanger/Aluminum frame door etc.

主要材质: 锌合金+塑料+铁
表面处理: 金属枪黑
承重: 40-60KG
适用范围: 各种实木吊门/铝框门等



Used for wooden door

- Zinc Alloy Buffer, Higher Strength and Load-bearing.
- Anti-oxidizing and Anti-Corrosion.



- Belt Fixing Plate
- Sync Fixing Plate



- Fixed door accessories



- 6m Belt






Temax
FURNITURE HARDWARE

Sliding Roller Series

移门轮系列

TELESCOPIC DOORS 联动门系列

- Fixed door accessories

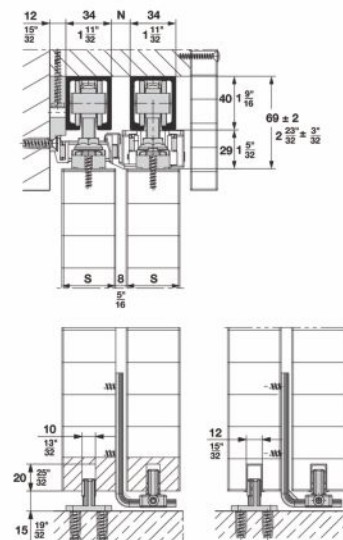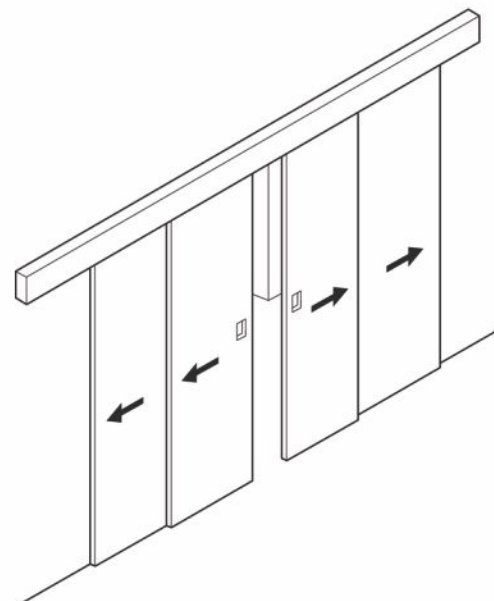

More products here

Sliding Roller Series

New Products www.shitemax.com


移门轮系列

Barn Door Systems 谷仓门系统



GC01

Barn door with double soft close
双缓冲谷仓门

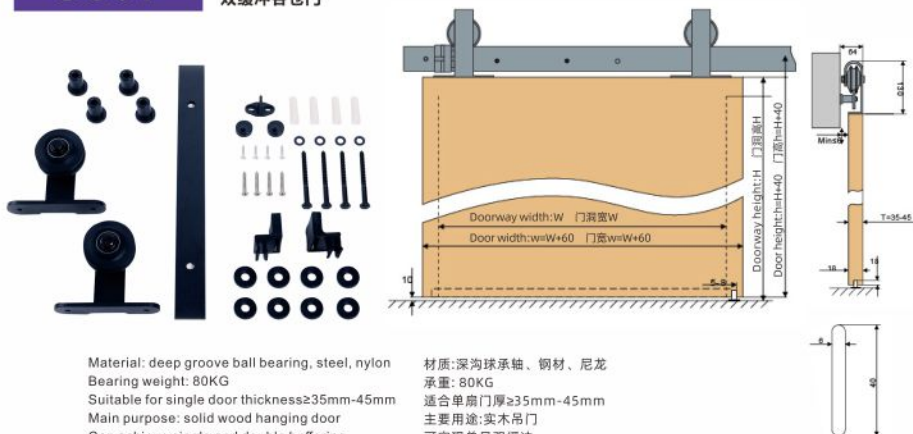

材质:深沟球轴承、钢材、尼龙
承重: 80KG
适合单扇门厚 $\geq 35\text{mm}$ -45mm
主要用途:实木吊门
可实现单只双缓冲
尼龙轮
不锈钢螺钉

GC02



材质:深沟球轴承、钢材、尼龙
承重: 80KG
适合单扇门厚 $\geq 35\text{mm}$ -45mm
主要用途:实木吊门
可实现单只双缓冲
尼龙轮
不锈钢铆钉




Barn Door Systems 谷仓门系统



GC03


Barn door with double soft close
双缓冲谷仓门

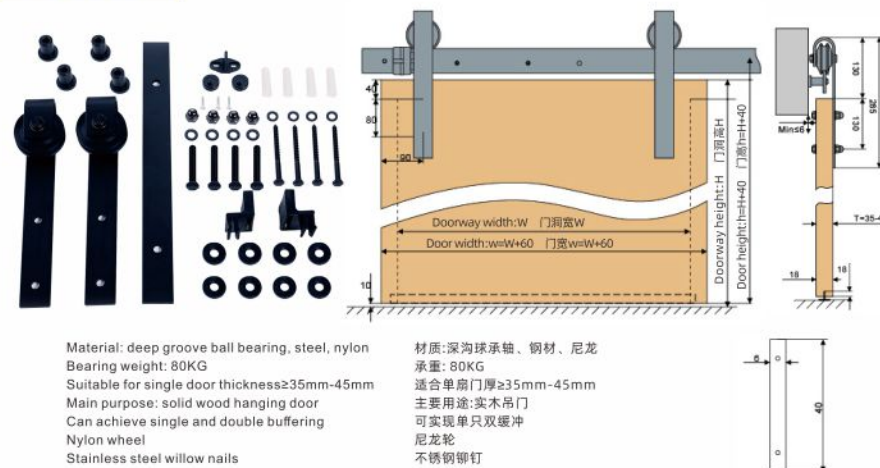


材质:深沟球轴承、钢材、尼龙
承重: 80KG
适合单扇门厚 $\geq 35\text{mm}$ -45mm
主要用途:实木吊门
可实现单只双缓冲
尼龙轮
不锈钢铆钉

GC04

Barn door with floding
折叠谷仓门

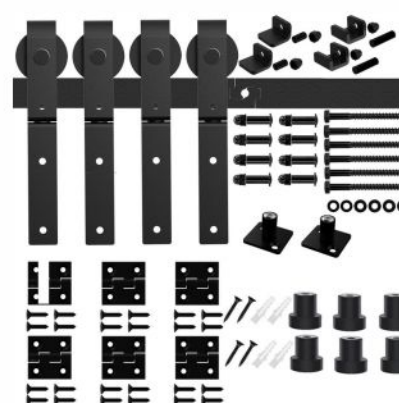

材质:深沟球轴承、钢材、尼龙
承重: 80KG
主要用途:实木吊门

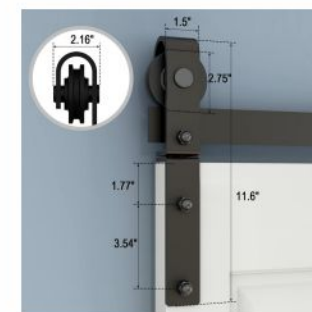

Sliding Roller Series

移门轮系列

SLIDING DOOR WHEELS 趟门轮

MFL01



One sliding roller matching concealed rails and external rails
Roller both side adjustment,
Two grooving option: semicircle & square
Door minimum width at 380mm
Door minimum gap at 6mm
Single door loading capacity: 50KG
Door thickness: 16mm
Height adjustment: 4mm
Apply to Bed wardrobe, shoes cabinet, kitchen cabinet, etc.

一款滑轮适用多种暗装，明装轨道滑轮双面调节，
兼顾暗装，明装。半圆形，方形两种开槽选择
滑轮高度极窄，门板边框最小可做到42mm
门板宽度≥380mm
两门板缝隙最小可做到6mm
单门承重≤50KG
适合门厚≥16mm
滑轮调节±4mm
适用于衣柜，鞋柜，橱柜等

MFL02



One sliding roller matching concealed rails and external rails
Roller both side adjustment,
Two grooving option: semicircle & square
Door minimum width at 380mm
Door minimum gap at 6mm
Single door loading capacity: 50KG
Door thickness: 16mm
Height adjustment: 4mm
Apply to Bed wardrobe, shoes cabinet, kitchen cabinet, etc.

一款滑轮适用多种暗装，明装轨道滑轮双面调节，
兼顾暗装，明装。半圆形，方形两种开槽选择
滑轮高度极窄，门板边框最小可做到42mm
门板宽度≥380mm
两门板缝隙最小可做到6mm
单门承重≤50KG
适合门厚≥16mm
滑轮调节±4mm
适用于衣柜，鞋柜，橱柜等



Sliding Roller Series

移门轮系列

SLIDING DOOR WHEELS 趟门轮

MFL03

Material: Iron, Plastic
Finish: Grey
Loading: 30KG


主要材质: 铁, 塑料
表面处理: 灰色
承重: 30KG



Type A Damper



Type B Damper

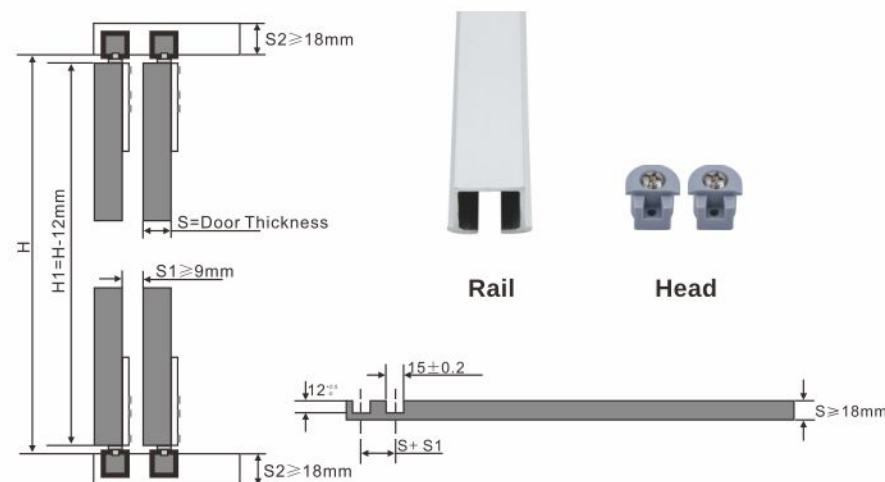

More products here

Sliding Roller Series

New Products www.shitemax.com

Sliding Roller Series

移门轮系列

SLIDING DOOR WHEELS 趟门轮

MFL04

Material: Steel+Plastic
Surface Treatment: Zinc/Matte
Rated Loading: 40kg

主要材质: 铁+塑料
表面处理: 镀锌+磨砂
承重: 40kg



MFL05

Material: Steel+Plastic
Surface Treatment: Zinc
Rated Loading: 40kg

主要材质: 铁+塑料
表面处理: 镀锌
承重: 40kg



Sliding Roller Series

移门轮系列

SLIDING DOOR WHEELS 趟门轮

MFL03B

Material: Steel+Plastic
Surface Treatment: Zinc/Matte
Rated Loading: 40kg

主要材质: 铁+塑料
表面处理: 镀锌+磨砂
承重: 40kg



MFL05B

Material: Steel+Plastic
Surface Treatment: Zinc/Matte
Rated Loading: 40kg

主要材质: 铁+塑料
表面处理: 镀锌+磨砂
承重: 40kg



MFL06

Material: Steel+Plastic
Surface Treatment: Zinc
Rated Loading: 40-60kg

主要材质: 铁+塑料
表面处理: 镀锌
承重: 40-60kg



More products here

Sliding Roller Series

New Products www.shitemax.com

New Products www.shitemax.com

Sliding Roller Series

Sliding Roller Series

移门轮系列

Folding Door Design Push Door Sliding System 折叠门系统

TM037



Door/door wing conditions

- 1: Single door wing width: 400-600mm
- 2: Single door wing load: Max20kg
- 3: Door wing height: Max2600mm
- 4: Door wing thickness: 18-40mm

Door/door wing width calculation

- 1: 2-wing folding door (single folding door) door wing width = (cabinet inside distance - gap + 2x covering distance) - 2
- 2: 4-wing folding door (double folding door) door wing width = (cabinet inside distance - 3x gap + 2x covering distance) ÷ 4

Note:

- 1.covering distance maximum 18mm
- 2.gap > 2mm
- 3.lower rail bottom installation and lower rail top installation can be interchanged

When the cabinet top is connected to the ceiling bottom, the door panel and the ceiling bottom need to leave a 5mm gap.

- 1: 2扇门翼折叠门(单折叠门)门翼宽度=(柜内距离-间隙+2x覆盖距离)-2
- 2: 4扇门翼折叠门(双折叠门)门翼宽度=(柜内距离-3x间隙+2x覆盖距离)÷4

注:1, 覆盖距离最大18mm

2, 间隙>2mm

3, 下轨下装和下轨上装可以互换

4, 柜顶跟天花底连接时, 门板跟天花底需留5mm间隙。

门/门翼条件

- 1:单扇门翼宽度:400-600mm
- 2:单扇门翼承重:最大20kg
- 3:门翼高度:最大2600mm
- 4:门翼厚度:18-40mm

- 1: 2-翼折叠门(单折叠门)门翼宽度=(柜内距离-间隙+2x覆盖距离)-2
- 2: 4-翼折叠门(双折叠门)门翼宽度=(柜内距离-3x间隙+2x覆盖距离)÷4

注意:

- 1.覆盖距离最大18mm
- 2.间隙>2mm
- 3.下轨下装和下轨上装可以互换

当柜顶跟天花底连接时, 门板跟天花底需留5mm间隙。

Sliding Roller Series

移门轮系列


Manual external sliding door wheel 手动外挂平趟门轮

TM038



Material: Zinc alloy
 Bearing weight: 40KG
 Door thickness adjustment: 18mm-40mm
 The maximum door width is 500mm, 600mm is recommended
 The width of the aluminum frame door must be at least 600mm wide, and 700mm wide can completely cover the upper wheel
 When the door panel height exceeds 2 meters, it is recommended to leave a gap of more than 5mm at the door gap C2

材质: 锌合金
 承重: 40KG
 门厚调节: 18-40mm
 门宽最小极限500mm, 建议600mm
 装铝框门的宽度要求600mm以上, 有700mm才可以完全盖住上轮
 门板高度超过2米以上, 建议门缝C2留5mm以上间隙

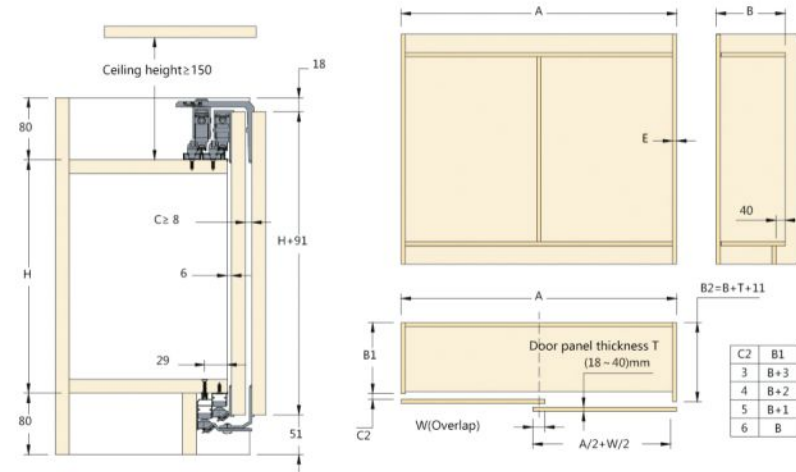

Sliding Roller Series

移门轮系列

3/7 Folding Door Design Push Door Sliding System 3/7折叠门系统

TM039



Material: Aluminum Alloy+Plastic+Iron
Load capacity: 40KG
Track length: 1.2M
Door Width: 600mm-1200mm
Door Height: 2000mm-2300mm
Door Thickness: 30-40mm
Function: 3/7 Folding

主要材质: 铝合金+塑料+铁
产品承重: 40KG
轨道长度: 1.2米
适用门宽: 600-1200mm
适用门高: 2000-2300mm
适用门厚: 30-40mm
功能: 3/7折叠



Temax
 FURNITURE HARDWARE

Sliding Roller Series

移门轮系列

Swing door system 回旋门系统

M73GA



Material: Galvanized Sheet
Size: 14"/16"/18"/20"/22"/24"/26"
Color: Black
Load capacity: 18KG

主要材质: 镀锌板
产品尺寸: 14"/16"/18"/20"/22"/24"/26"
产品颜色: 黑色
产品承重: 18KG



More products here

Sliding Roller Series

New Products www.shitemax.com

New Products www.shitemax.com

Sliding Roller Series

Sliding Roller Series

移门轮系列

Ghost Door(Wooden Door) 幽灵门 (木门款)

M973



Product parameters:

Scope of application: single and double wooden sliding doors
Adjustment performance: up and down, left and right, adjustable
Door weight: single door $\leq 60\text{kg}$
Door width: 2-wheel single door width $\geq 800\text{mm}$
4-wheel single door width $\geq 860\text{mm}$

产品参数:

适用范围:单扇和双扇木质推拉门
调节性能:上下、左右,可调节
门重:单扇门 $\leq 60\text{kg}$
门宽:2轮单扇门宽 $\geq 800\text{mm}$
4轮单扇门宽 $\geq 860\text{mm}$

Features:

- ☐ Patented product, exclusive design;
- ☐ Hidden track design, high-end atmosphere;
- ☐ The first non-spring buffer, never rust, buffer stroke 60MM;
- ☐ Lock design, sliding door anti-falling system;
- ☐ The main bracket bears 60 kg and is not easy to deform;
- ☐ Three-dimensional adjustment of height, wall distance and door balance.
- ☐ 10mm to adjust the height, wall distance and the balance of the door.

产品特点

- 专利产品,独家设计;
- 隐藏式轨道设计,高端大气;
- 首创无簧缓冲器,永不生锈,缓冲行程60MM;
- 锁扣设计,趟门防脱落系统;
- 主支架承重60公斤,不易变形;
- 三维调节高低,墙身距离及门的平衡.
- 10mm 调节高低、墙身距离及门的平衡;

Sliding Roller Series

移门轮系列

Ghost Door(Wooden Door) 幽灵门 (木门款)



Standard Configuration 标准配置:

Accessories description 配件描述	Configure 配置	Accessories description 配件描述	Configure 配置
Wall Bracket 主支架	1	Down runner 地轮	2
Soft close device 缓冲器	2	Brush 毛刷	4
Side runner 侧边轮	2	Track 轨道	2
Optional four wheels Wall Bracket 主支架	1	Up Track Down Track	2
		Positioning wheel 定位轮	1



Sliding Roller Series

移门轮系列

Ghost Door (Aluminum Frame Door) 幽灵门 (铝框门款)

M973L



Product parameters:

- ☐ Scope of application: single and double Aluminum frame doors
- ☐ Adjustment performance: up and down, left and right, adjustable
- ☐ Door weight: single doors 80kg
- ☐ Door width: ≤1300mm

产品参数:

- 适用范围: 单扇和双扇铝框推拉门
- 调节性能: 上下、左右, 可调节
- 门重: 单扇门 ≤80kg
- 门宽: ≤1300mm

Features:

- ☐ Patented product, exclusive design;
- ☐ Hidden track design, high-end atmosphere;
- ☐ The first non-spring buffer, never rust, buffer stroke 60MM;
- ☐ Lock design, sliding door anti-falling system;
- ☐ The main bracket bears 80 kg and is not easy to deform;
- ☐ Three-dimensional adjustment of height, wall distance and door balance.
- ☐ 10mm to adjust the height, wall distance and the balance of the door.

产品特点

- 专利产品, 独家设计;
- 隐藏式轨道设计, 高端大气;
- 首创无簧缓冲器, 永不生锈, 缓冲行程60MM;
- 锁扣设计, 趟门防脱落系统;
- 主支架承重80公斤, 不易变形;
- 三维调节高低, 墙身距离及门的平衡.
- 10mm 调节高低、墙身距离及门的平衡;



Sliding Roller Series

移门轮系列

Ghost Door (Aluminum Frame Door) 幽灵门 (铝框门款)



More products here

Standard Configuration 标准配置:

Accessories description 配件描述	Configure 配置	Accessories description 配件描述	Configure 配置
Wall Bracket 主支架	1	Down runner 地轮	2
Soft close device 缓冲器	2	ST4.5*4 cross head tapping screws ST4.5*40十字平头自攻钉	5
Side runner 侧边轮	2	Positioning wheel 定位轮	1




Sliding Roller Series

移门轮系列

Interior Push Door 内推门

BS02

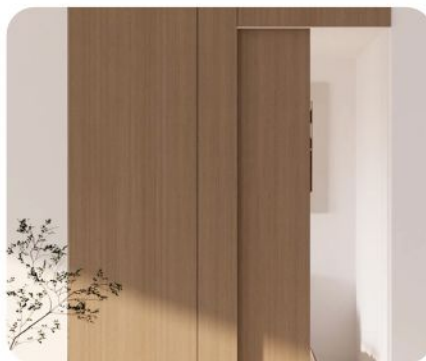

Scope of application: single- leaf wooden sliding door
Adjustment performance: three-dimensional adjustment
Door weight: single doors 80kg
Door width: ≥750 mm

Features:
After the door is closed, the door is flush with the wall and the appearance is smooth and neat;
The door opening track is smaller, which can effectively use the space in front of the door;
Just push the door, no handle required;
No lower track, no need for grooving on the floor, beautiful and easy to clean;
3D adjustment, easy to install;
Using special material wheels, smooth and silent;
The track is pierced through steel bars, continuously and smoothly, and the steering is smooth;

适用范围:单扇木质推拉门
调节性能:三维调节
门重:单扇门≤80kg
门宽:≥750mm

产品特点:
门关闭后, 门与墙齐平外观平整、整洁;
开门轨迹更小, 可有效利用门前空间;
推门即可, 无需把手;
无下轨道, 无需在地板上进行开槽加工, 美观易清洁
三维调节, 易安装;
采用特殊材料轮子, 顺滑静音;
轨道穿钢条, 弯而不断, 转向顺畅

Sliding Roller Series

移门轮系列

Interior Push Door 内推门



More products here

Standard Configuration 标准配置:

Accessories description 配件描述	Configure 配置	Accessories description 配件描述	Configure 配置
Cornering buffer 拐角缓冲器	1	Hanging wheel 吊体轮	2
Guiding track(top) 导轨(顶部)	2	Guiding track(bottom) 导轨(底部)	1
Bracket (for leading edge) 支架(用于前缘)	1	Bracket (for trailing edge) 支架(用于后缘)	1
Door stopper (floor) 门挡件(地板)	1	Bumper block 缓冲块	1
Bottom Stopper 底部止摆器	1	Connecting plate 连接板	1
Trigger 触发器	2	Upper track(1000mm) 上部轨道(1000mm)	2
Upper track(700mm) 上部轨道(700mm)	1	Bottom track 底部轨道	1



Sliding Roller Series

移门轮系列

Manual bus sliding door wheel

手动巴士平趟门轮

BS05 35KG 50KG

Slide rail assembly (including upper slide rail)
滑轨总成(含上滑轨)



Lower slide rail
下滑轨

Right door lower guide wheel
右门下导轮



Left door lower guide wheel
左门下导轮



Lower guide wheel 下导轮



Regulator 调节器



Accessories 配件

Installing the positioning card 安装定位卡

The two doors are in the same plane after the cabinet door is closed. The damping system is used when the cabinet door is closed, and a buffer can be optionally equipped when the door is opened to form a two-way damping device. The pulley is made of imported DuPont 100POM, which is smooth and durable. The cabinet door can be fine-tuned by $\pm 4.5\text{mm}$ in height and $\pm 3.5\text{mm}$ in left and right through the adjuster. It is suitable for wooden doors and aluminum frame doors with a door thickness of 18-45mm. The system can be used for cabinets with a width of 1200-3000mm. The conventional track sizes are: 1159, 1359, 1559, 1759, 1959, 2159, 2359, 2559, 2759, 2959. Specifications other than these are considered non-standard and are welcome to be customized. The cabinet height is best within 2.2m.

柜门关闭后两门同平面, 整体美观、大气。柜门关闭时采用阻尼系统, 开门可选配缓冲器, 组成双向阻尼装置。滑轮采用进口杜邦100POM, 顺滑很耐用。柜门可以通过调节器高低微调 $\pm 4.5\text{mm}$, 左右微调 $\pm 3.5\text{mm}$ 。适用门厚为18-45mm的木门、铝框门。柜体在1200-3000mm均可使用该系统。常规轨道尺寸为: 1159、1359、1559、1759、1959、2159、2359、2559、2759、2959, 这些规格以外的均视为非规格, 欢迎订做。柜体高度2.2m以内效果最好



Sliding Roller Series

移门轮系列

Manual bus sliding door wheel

手动巴士平趟门轮




More products here




Single-door and double-door sliding door handle installation design reference
The total thickness of the handle + door is recommended not to exceed 45mm.

单门及双门平趟门门拉手安装设计参考
拉手+门总厚度建议不要超过45mm。

The door opens from the middle to left and right.
门板从中间向左右两边开

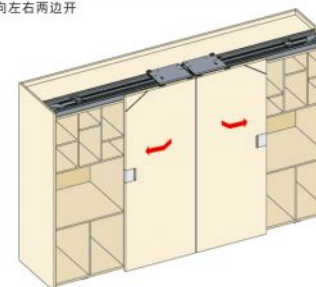


单开右门 Single left door

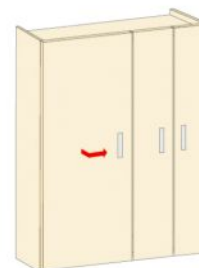

单开右门 Single right door




两门 Two doors

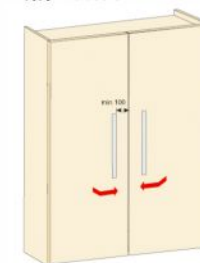


两门 Two doors



单开中间门 Single door middle

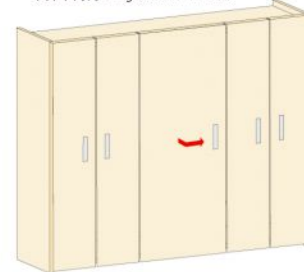

单开中间门 Single door middle

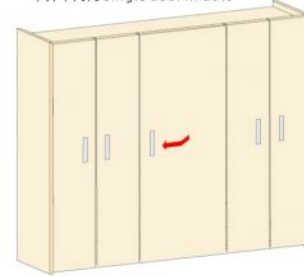

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller Series 移门吊轮



TR017



Material: Cold Rolled Steel+Plastic
Finish: Galvanized
Loading: 15KG

主要材质:铁+塑料
表面处理:镀锌
承重:15KG

TR018



Material: Cold Rolled Steel+Plastic
Finish: Galvanized
Loading: 30KG

主要材质:铁+塑料
表面处理:镀锌
承重:30KG

TM327A



Material: Cold Rolled Steel+Plastic
Finish: Galvanized
Loading: 80KG



主要材质:铁+塑料
表面处理:镀锌
承重:80KG

TM026



Material:Iron+Plastic
Finish:Zinc
Optional:Glass clamp/Clip on plate
Loading :40KG/60KG

主要材质:铁、塑料
表面处理:镀锌
可选挂片:玻璃夹/快拆挂片
承重: 40KG/60KG

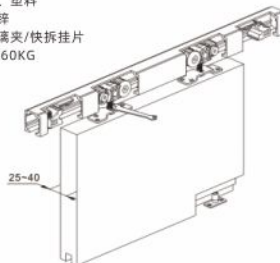

Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller Series 移门吊轮



More products here

TM023

Material:Zinc alloy+Plastic
Finish:Zinc
Optional:Glass clamp/Clip on plate
Loading :80KG


主要材质:锌合金、塑料
表面处理:镀锌
可选挂片:玻璃夹/快拆挂片
承重: 80KG



TR019




TR020




Material: Iron +Plastic
Finish: Zinc
Loading: 60KG

主要材质:铁+塑料
表面处理:镀锌
承重:60KG




15mm≤E≤20mm



21mm≤E≤30mm

E	D
15mm	6 mm
18mm	9 mm
20mm	18mm
22mm	20mm
25mm	23mm
27mm	25mm
30mm	28mm




Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller Series 移门吊轮



TM325



Material:Iron, Plastic
Finish:Zinc alloy
Loading:80KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 80KG

Sliding Roller Series


移门轮系列

Hanging&Sliding Door Roller Series 移门吊轮




More products here


TM411




Material:Iron, Plastic
Finish:Zinc alloy
Loading:40KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 40KG




TM413



Material:Iron, Plastic
Finish:Zinc alloy
Loading:40KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 40KG




TM315




Material:Iron, Plastic
Finish:Zinc alloy
Loading:80KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 80KG

TM326



Material:Iron, Plastic
Finish:Zinc alloy
Loading:80KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 80KG

TM327



Material:Iron, Plastic
Finish:Zinc alloy
Loading:80KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 80KG


Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller Series 移门吊轮




TM450

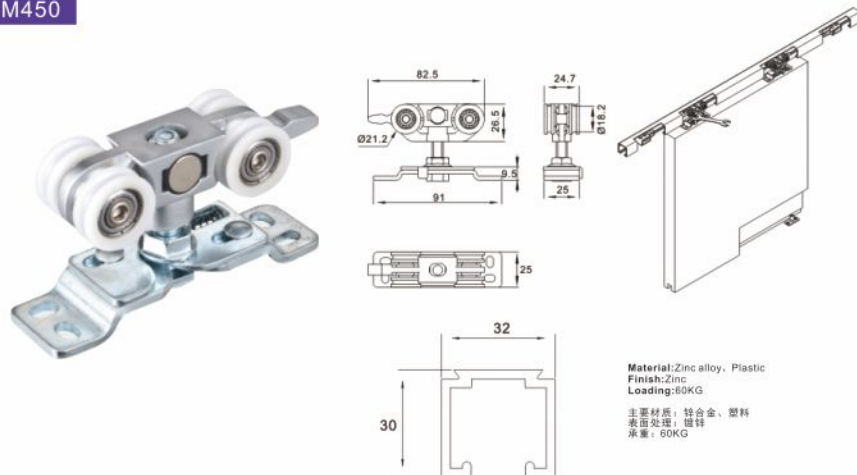

TM500



TM747

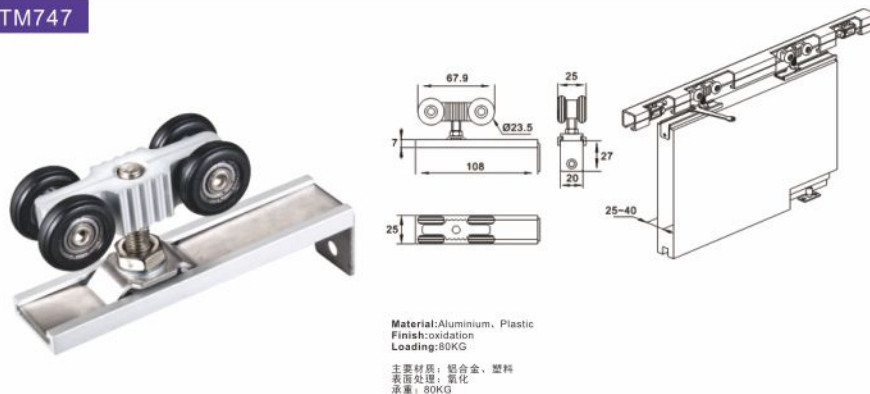


Sliding Roller Series

移门轮系列

Hanging&Sliding Door Roller Series 移门吊轮



TM757

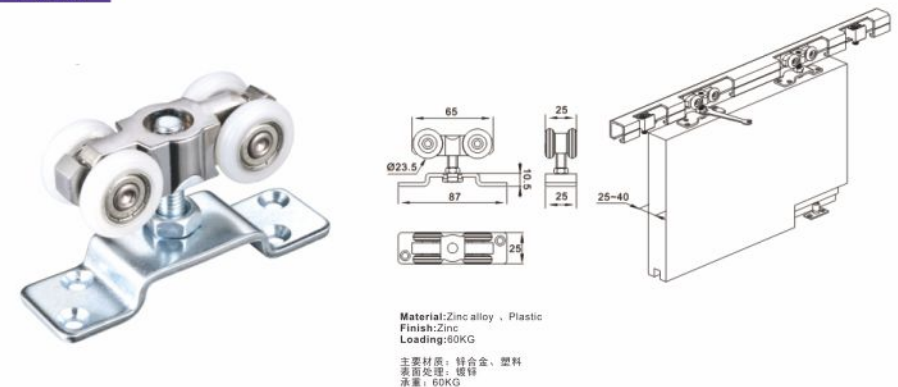

TM758



TM759



TM760



Sliding Roller Series

移门轮系列

Visible Sliding Door Roller Series 移门明轮



DW018A Loading: 50KG-60KG

Material: Iron+Plastic
Finish: Zinc
主要材质: 铁+塑料
表面处理: 镀锌




DW018B Loading: 60KG-70KG

Material: Iron+Plastic
Finish: Zinc
主要材质: 铁+塑料
表面处理: 镀锌



MD910



Sliding Roller Series

移门轮系列

Visible Sliding Door Roller Series 移门明轮




More products here

DW1001



Material: Iron, Plastic
Finish: Zinc
Loading: 50-80KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 50-80KG



DW06



Material: Zinc Alloy+Plastic
Surface Treatment: Galvanized/Black
Rated Loading: 45-60kg

主要材质: 锌料+塑料
表面处理: 镀锌/镀黑
承重: 45-60kg

DW07



Material: Zinc Alloy+Plastic
Surface Treatment: Galvanized/Black
Rated Loading: 45-60kg

主要材质: 锌料+塑料
表面处理: 镀锌/镀黑
承重: 45-60kg

DW019



Material: Iron+Plastic
Finish: Zinc
Loading: 50-80KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 50-80KG

Sliding Roller Series

移门轮系列

Visible Sliding Door Roller Series 移门明轮



DW015



DW015A



DW015E



DW015F

Material: Iron, Plastic
Finish: Zinc
Loading: 50-60KG
Upper wheel size: 36mm/37.5mm/38mm

主要材质: 铁、塑料
表面处理: 镀锌
承重: 50-60KG
上轮尺寸: 36mm/37.5mm/38mm



MD909




Material: Iron, Plastic
Finish: Zinc
Loading: 50-70KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 50-70KG

DW015D



Material: Iron, Plastic
Finish: Zinc
Loading: 50-60KG
主要材质: 铁、塑料
表面处理: 镀锌
承重: 50-60KG



MD912

Sliding Roller Series


移门轮系列

Visible Sliding Door Roller Series 移门明轮



More products here

DW015B



Material: Zinc Alloy+Plastic
Surface Treatment: Galvanized/Black
Rated Loading: 15-25kg

主要材质: 锌料+塑料
表面处理: 镀锌/镀黑
承重: 15-25kg

DW016

Material: Iron, Plastic
Finish: Zinc
Loading: 50-70KG

主要材质: 铁、塑料
表面处理: 镀锌
承重: 50-70KG



DW016F

Material: Iron, Plastic
Finish: Zinc
Loading: 60-70KG
Upper wheel size: 36-42mm

主要材质: 铁、塑料
表面处理: 镀锌
承重: 60-70KG
上轮尺寸: 36-42mm



DW017



Material: Iron+Plastic
Finish: Yellow zinc plating/White zinc plating
Loading: 50-80KG

主要材质: 铁、塑料
表面处理: 镀黄锌/镀白锌
承重: 50-80KG

DW020



Material: Zinc Alloy+Plastic
Surface Treatment: Galvanized/Black
Rated Loading: 45kg

主要材质: 锌料+塑料
表面处理: 镀锌/镀黑
承重: 45kg

Sliding Roller Series

移门轮系列

Visible Sliding Door Roller Series 移门明轮


DW02

Material: Steel+Plastic
Surface Treatment: Black Painted
Rated Loading: 50-60kg

主要材质: 铁+塑料
表面处理: 喷漆黑
承重: 50-60kg



Up rollers Optional

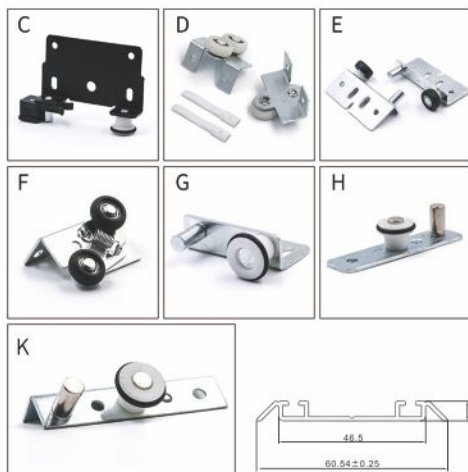

DW03

Material: Steel+Plastic
Surface Treatment: Zinc with Black Painted
Rated Loading: 40kg

主要材质: 铁+塑料
表面处理: 镀锌+喷漆黑
承重: 40kg



Up rollers Optional



Sliding Roller Series

移门轮系列


Furniture Sliding Door Roller Series 移门家具轮

DW03F



Material: Iron, Plastic
Finish: Zinc
Loading: 50KG


主要材质: 铁, 塑料
表面处理: 镀锌
承重: 50KG



DW05S




MD913



Material: Iron, Plastic
Finish: Black
Loading: 60-75KG

主要材质: 铁, 塑料
表面处理: 黑色
承重: 60-75KG

DR02



Material: Iron, Plastic
Finish: Zinc
Loading: 25KG


主要材质: 铁, 塑料
表面处理: 镀锌
承重: 25KG

TM20



Material: Iron, Plastic
Finish: Zinc
Loading: 10KG

主要材质: 铁, 塑料
表面处理: 镀锌
承重: 10KG

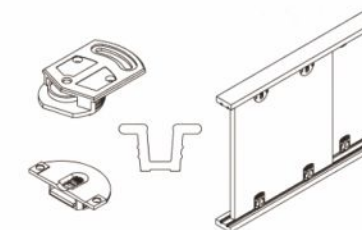

More products here

Sliding Roller Series

New Products www.shemax.com

New Products www.shemax.com

Sliding Roller Series


Sliding Roller Series

移门轮系列

Furniture Sliding Door Roller Series 移门家具轮




JS30




Material: Iron, Plastic
Finish: Black
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 黑色
承重: 40KG

JS30Y




Material: Iron, Plastic
Finish: Black
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 黑色
承重: 40KG

TM3830-A

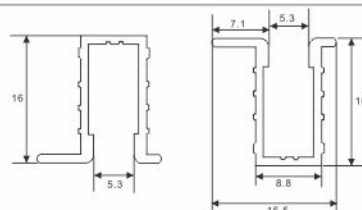

Material: Iron, Plastic
Finish: Zinc alloy
Loading: 30KG
主要材质: 铁, 塑料
表面处理: 镀锌
承重: 30KG

TM3830-B

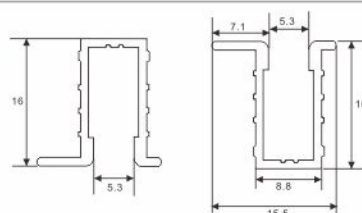

Material: Iron, Plastic
Finish: Zinc alloy
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 镀锌
承重: 40KG

Sliding Roller Series


移门轮系列

Furniture Sliding Door Roller Series 移门家具轮




More products here

TM3830-C




Material: Iron, Plastic
Finish: Zinc
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 镀锌
承重: 40KG

TM353



Material: Iron, Plastic
Finish: Zinc
Loading: 30KG
主要材质: 铁, 塑料
表面处理: 镀锌
承重: 30KG

YM30201



Material: Iron, Plastic
Finish: Zinc
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 镀锌
承重: 40KG

YM008



Material: Iron, Plastic
Finish: Zinc
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 镀锌

YM008B



Material: Iron, Plastic
Finish: Zinc
Loading: 40KG
主要材质: 铁, 塑料
表面处理: 镀锌

Sliding Roller Series

移门轮系列

Sliding door damper 移门缓冲器




M906



Material : Plastic
Finish : Grey


主要材质: 塑料
表面处理: 灰色

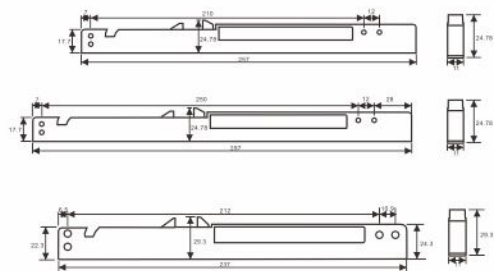


According to the weight of sliding door,
the buffer divided to 5 series:

- 30/40A—suitable for 40-60KG
- 30/40B—suitable for 20-40KG
- 30/40C—suitable for 10-20KG
- 30/40D—suitable for 5-10KG
- 30longer—suitable for 60-100KG

It's suitable for the sliding door
which space between slide and
door frame is in 22-30mm

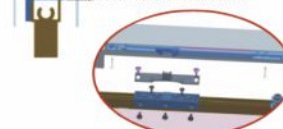

It's suitable for the sliding door
which space between slide and
door frame is in 22-30mm

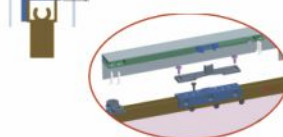


M920



Material : Plastic
Finish : Grey

主要材质: 塑料
表面处理: 灰色



Sliding Roller Series


移门轮系列

Sliding door damper 移门缓冲器




More products here

M921

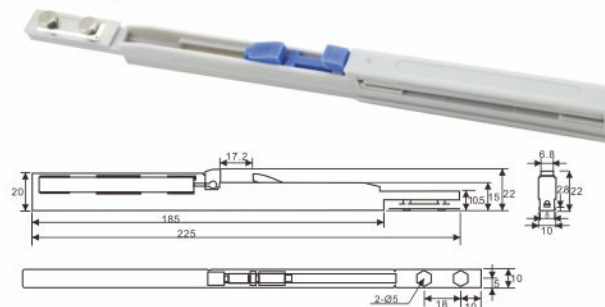

Material : Plastic
Finish : Grey

主要材质: 塑料
表面处理: 灰色




M979

Light-duty Loading: $\leq 15\text{KG}$
Standard Loading: 15-25KG
Heavy-duty Loading: 25-40KG





Material: Iron 、 Plastic
Finish: Zinc

主要材质: 铁、塑料
表面处理: 镀锌

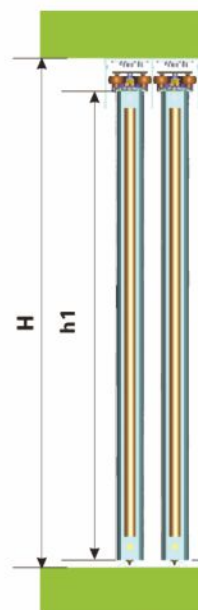

Door height $H_1 = H - 43\text{mm}$

H = door opening/wardrobe inner height
 H_1 = Door height; W = Door width;
650 = two dampers' length

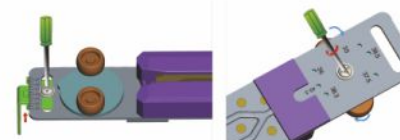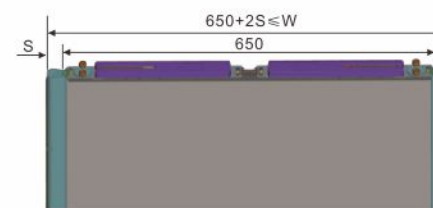

DOOR CONTROL SERIES

门控系列

Floor spring 地弹簧

WF052



Dimension Of Main Body: 190x40x70mm
Appearance dimension of base: 107x48mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1000mm
Weight of Door: ≤110kg
Max. Open Angle: 150°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 190x40x70mm
底座外观尺寸: 107x48mm
主要材质: 不锈钢、铝合金
最大门宽: 1000mm
最大门重: ≤110kg
最大开度: 150°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°

DOOR CONTROL SERIES

门控系列

Floor spring 地弹簧

WF054



Dimension Of Main Body: 190x40x70mm
Appearance dimension of base: 107x48mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1000mm
Weight of Door: ≤110kg
Max. Open Angle: 150°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 190x40x70mm
底座外观尺寸: 107x48mm
主要材质: 不锈钢、铝合金
最大门宽: 1000mm
最大门重: ≤110kg
最大开度: 150°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°

WF053



Dimension Of Main Body: 180x33x45mm
Appearance dimension of base: 107x48mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1000mm
Weight of Door: ≤110kg
Max. Open Angle: 150°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 180x33x45mm
底座外观尺寸: 107x48mm
主要材质: 不锈钢、铝合金
最大门宽: 1000mm
最大门重: ≤110kg
最大开度: 150°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°

WF055



Dimension Of Main Body: 190x40x70mm
Appearance dimension of base: 107x48mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1000mm
Weight of Door: ≤110kg
Max. Open Angle: 150°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 190x40x70mm
底座外观尺寸: 107x48mm
主要材质: 不锈钢、铝合金
最大门宽: 1000mm
最大门重: ≤110kg
最大开度: 150°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°



More products here

DOOR CONTROL SERIES

门控系列

Floor spring 地弹簧

WF056



Dimension Of Main Body: 191x41x87mm
Appearance dimension of base: 107x48mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1000mm
Weight of Door: ≤110kg
Max. Open Angle: 150°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 191x41x87mm
底座外观尺寸: 107x48mm
主要材质: 不锈钢、铝合金
最大门宽: 1000mm
最大门重: ≤110kg
最大开度: 150°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°

WF057



Dimension Of Main Body: 180x33x45mm
Appearance dimension of base: 107x48mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1000mm
Weight of Door: ≤110kg
Max. Open Angle: 150°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 180x33x45mm
底座外观尺寸: 107x48mm
主要材质: 不锈钢、铝合金
最大门宽: 1000mm
最大门重: ≤110kg
最大开度: 150°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°

DOOR CONTROL SERIES

门控系列

Floor spring 地弹簧

WF058



Dimension Of Main Body: 131x26x45mm
Appearance dimension of base: 50x36mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 900mm
Weight of Door: ≤60kg
Max. Open Angle: 135°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 131x26x45mm
底座外观尺寸: 50x36mm
主要材质: 不锈钢、铝合金
最大门宽: 900mm
最大门重: ≤60kg
最大开度: 135°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°

WF059



Dimension Of Main Body: 180x33x45mm
Appearance dimension of base: 107x49mm
Material: Stainless Steel, Aluminum Alloy
Width of Door: 1500mm
Weight of Door: ≤150kg
Max. Open Angle: 360°
Passed Durability Test: 500000 Cycles
Closing Speed Adjustment Speed (1): 90°-15°
Closing Speed Adjustment Speed (2): 15°-0°

主体尺寸: 180x33x45mm
底座外观尺寸: 107x49mm
主要材质: 不锈钢、铝合金
最大门宽: 1500mm
最大门重: ≤150kg
最大开度: 360°
耐久性测试: 500000次
关闭速度调整速度(1): 90°-15°
关闭速度调整速度(2): 15°-0°



More products here

DOOR CONTROL SERIES

门控系列

Adjustable upper seat + top axis 有框中轴门]可调上座+顶轴

WF060



Main Body: 157x28x12mm

Material: Stainless Steel

1. Adjustable left and right, inside and outside

2. With wire hole

3. 12mm diameter precision casting axis

Can be used for center-axis/off-axis aluminum frame doors

主体尺寸: 157x28x12mm

主要材质: 不锈钢


1. 可左右、内外调节

2. 带过线孔

3. 直径12mm精铸轴

可用于中轴、偏轴有框门

Adjustment

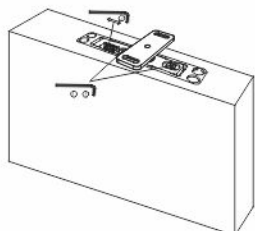


1. Install and fix the door leaf. If you need to adjust the left and right door gaps (door leaf thickness 50mm), open and level the door leaf, and loosen two hexagonal screws (two circles of thread).

2. Use a hexagonal wrench to turn the gear left and right to adjust the gaps on both sides of the door to the best effect.


3. Tighten the two hexagonal screws, and buckle the decorative cover after the left and right adjustments are completed.

Drilling size

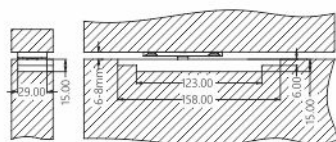


Product size

Top axis

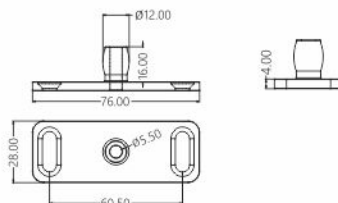

Adjustable upper seat

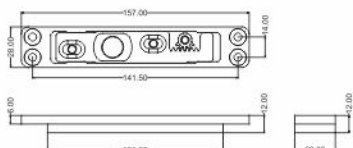

DOOR CONTROL SERIES

门控系列

Central axis hydraulic pivot door closer 中轴门液动器

WF061



Main Body: 304x32x26mm

Material: Ss304 finish, Steel body

Weight of Door: ≤100kg

1. 2D adjustable base

2. Forged bearing steel cam pivot

3. Two force adjust control valve (easy opening, soft closing, stable)

4. 90 degree positioning function

5. Locking force at small angles

6. 360 degree forward and reverse door opening and closing

7. Suitable for door thickness of more than 38mm central axis pivot wooden doors or aluminum frame doors

主体尺寸: 304x32x26mm

主要材质: 不锈钢饰面, 钢主体

产品承重: 100KG

1、二维可调底座

2、锻造轴承钢凸轮转轴

3、两个力矩调节阀

(开门轻、闭门顺、力矩稳)

4、90度带定位功能

5、小角度有闭锁力

6、可360度正反转开关门

7、适用于门厚38mm以上的

中轴木门或铝框门



Technical parameters and features

Product model	WF061.60	WF061.100
Material	45#steel	45#steel
Two-way opening and closing	●	●
Max door width from the axis to the door opening	≤650mm	≤800mm
Bottom frame inner width	≥34mm	≥34mm
Max door weight	60kg	100kg
Max opening angle	360°	360°
90° auxiliary positioning	●	●
Two-stage closing speed regulating valve control	●	●
Closing torque	EN2	EN3
● YES	○ NO	■ Optional ※ 200,000 times fatigue test



More products here

DOOR CONTROL SERIES

门控系列

Central axis hydraulic pivot door closer 中轴门液动器

WF062



Main Body: 304x32x32mm
Material: Ss304 finish, Steel body
Weight of Door: ≤200kg
1. 2D adjustable base
2. Forged bearing steel cam pivot
3. Two force adjust control valve (easy opening, soft closing, stable)
4. 90 degree positioning function
5. Locking force at small angles
6. 360 degree forward and reverse door opening and closing
7. Suitable for door thickness of more than 40mm central axis pivot wooden doors or aluminum frame doors

主体尺寸: 304x32x32mm
主要材质: 不锈钢饰面, 钢主体
产品承重: 200KG
1、二维可调底座
2、锻打轴承钢凸轮转轴
3、两个力矩调节阀
(开门轻、闭门顺、力矩稳)
4、90度带定位功能
5、小角度有闭锁力
6、可360度正反转开关门
7、适用于门厚40mm以上的中轴木门或铝框框门



Technical parameters and features

Product model	WF062.150	WF062.200
Material	45#steel	45#steel
Two-way opening and closing	●	●
Max door width from the axis to the door opening	≤ 1000mm	≤ 1100mm
Bottom frame inner width	≥ 34mm	≥ 34mm
Max door weight	150kg	200kg
Max opening angle	360°	360°
90° auxiliary positioning	●	●
Two-stage closing speed regulating valve control	●	●
Closing torque	EN4	EN5
● YES ○ NO ■ Optional ※ 200,000 times fatigue test		



DOOR CONTROL SERIES

门控系列

Framed Door offset axis pivot door closer 偏轴门液动器

WF063



Main Body: 259x32x26mm
Material: Ss304 finish, Steel body
Weight of Door: ≤100kg
1. 2D adjustable base
2. Forged bearing steel cam pivot
3. Two force adjust control valve (easy opening, soft closing, stable)
4. 90 degree positioning function
5. Locking force at small angles
6. Suitable for door thickness of more than 40mm offset axis pivot wooden doors or aluminum frame doors

主体尺寸: 259x32x26mm
主要材质: 不锈钢饰面, 钢主体
产品承重: 100KG
1、二维可调底座
2、锻打轴承钢凸轮转轴
3、两个力矩调节阀
(开门轻、闭门顺、力矩稳)
4、90度带定位功能
5、小角度有闭锁力
6、适用于门厚40mm以上的偏轴木门或偏轴铝框框门



Technical parameters and features

Product model	WF063.60	WF063.100
Material	45#steel	45#steel
Two-way opening and closing	●	●
Max door width from the axis to the door opening	≤ 800mm	≤ 1000mm
Bottom frame inner width	≥ 34mm	≥ 34mm
Max door weight	60kg	100kg
Max opening angle	125°	125°
90° auxiliary positioning	●	●
Two-stage closing speed regulating valve control	●	●
Closing torque	EN3	EN4
● YES ○ NO ■ Optional ※ 500,000 times fatigue test		



More products here

DOOR CONTROL SERIES

门控系列

Framed Door offset axis pivot door closer 偏轴门液动器

WF064



Main Body: 259x32x32mm
Material: Ss304 finish, Steel body
Weight of Door: ≤120kg
1. 2D adjustable base
2. Forged bearing steel cam pivot
3. Two force adjust control valve (easy opening, soft closing, stable)
4. 90 degree positioning function
5. Locking force at small angles
6. open the door to a max of 125 degrees inside and outside
7. Suitable for door thickness of more than 40mm offset axis pivot wooden doors or aluminum frame doors

主体尺寸: 259x32x32mm
主要材质: 不锈钢饰面, 钢主体
产品承重: 120KG
1、二维可调底座
2、锻打轴承钢凸轮转轴
3、两个力矩调节阀
(开门轻、闭门顺、力矩稳)
4、90度带定位功能
5、小角度有闭锁力
6、可内外开门至最大125度
7、适用于门厚40mm以上的偏轴木门或金属门



DOOR CONTROL SERIES

门控系列

Framed Door offset axis pivot door closer 偏轴门液动器

WF065



Main Body: 304x32x32mm
Material: Ss304 finish, Steel body
Weight of Door: ≤150kg
1. 2D adjustable base
2. Forged bearing steel cam pivot
3. Two force adjust control valve (easy opening, soft closing, stable)
4. 90 degree positioning function
5. Locking force at small angles
6. open the door to a max of 125 degrees inside and outside
7. Suitable for door thickness of more than 38mm central axis pivot wooden doors or aluminum frame doors

主体尺寸: 304x32x32mm
主要材质: 不锈钢饰面, 钢主体
产品承重: 150KG
1、二维可调底座
2、锻打轴承钢凸轮转轴
3、两个力矩调节阀
(开门轻、闭门顺、力矩稳)
4、90度带定位功能
5、小角度有闭锁力
6、可内外开门至最大125度
7、适用于门厚40mm以上的中轴木门或极窄框门



Technical parameters and features

Product model	WF064.100	WF064.120
Material	45#steel	45#steel
Two-way opening and closing	●	●
Max door width from the axis to the door opening	≤ 1000mm	≤ 1100mm
Bottom frame inner width	≥ 34mm	≥ 34mm
Max door weight	100kg	120kg
Max opening angle	125°	125°
90° auxiliary positioning	●	●
Two-stage closing speed regulating valve control	●	●
Closing torque	EN3	EN4
● YES ○ NO ■ Optional ※ 500,000 times fatigue test		

Technical parameters and features

Product model	WF065.120	WF065.150
Material	45#steel	45#steel
Two-way opening and closing	●	●
Max door width from the axis to the door opening	≤ 1100mm	≤ 1250mm
Bottom frame inner width	≥ 34mm	≥ 34mm
Max door weight	120kg	150kg
Max opening angle	125°	125°
90° auxiliary positioning	●	●
Two-stage closing speed regulating valve control	●	●
Closing torque	EN4	EN5
● YES ○ NO ■ Optional ※ 500,000 times fatigue test		



More products here

DOOR CONTROL SERIES

门控系列

Framed Door offset axis pivot door closer 偏轴门液动器

WF070

Max load bearing capacity is 600 kg when the central axis pivot is installed,
Max load bearing capacity is 350 kg when the offset axis pivot is installed,
Max distance from the shaft center to the door is 1350mm
Material: 45#steel

中轴安装的时候最大承重是600公斤, 偏轴安装的时候最大承重是350公斤, 轴心到门边最大距离是1350mm
主要材质: 45号磨具钢



DOOR CONTROL SERIES

门控系列

Framed Door offset axis pivot door closer 偏轴门液动器

WF071



More products here

Product image	Technical specifications 1. Stop range: You can stop at any Angle after the deviation Angle is 10 2. Positioning Angle: 0°, 90°, 180°, 270° 3. Bearing range: ≤600kg (shaft core ≤1350mm from the door) 4. Two-dimensional base: Angle can be adjusted by diagonal screws.
Decomposition diagram 1. Main body *1 2. Long decorative cover *1 3. Pull explosion screw *2 4. Base *1 5. Short decorative cover 6. Pull explosion sleeve *2	Dimensional drawings
Installation procedure 1. Determine the installation position, draw the line and drill the hole with the infrared instrument to ensure that the base screws are locked. By the ruler/inch diagram or physical opening, different thickness of the door, the size of the side seam is different.	2. Install and secure the main body and the upper bracket to the door leaf, insert the top shaft into the upper bracket, and set the door leaf to the open position. Insert the angled part into the base and secure the top shaft.
3. Open and close the door to check if the horizontal angle of the door leaf installation and the side door gaps are symmetrical on both sides. You can use a hex wrench to adjust the diagonal base screws to ensure the levelness of the door with the door or the door with the frame. The seat can be adjusted left and right to modify the door gap, and the top shaft can be adjusted for internal and external offset.	4. Make sure that the function and installation of the door leaf meet the requirements, snap into the stainless steel decorative cover, and the installation is completed.



Main Body: 106x28x18mm

Material: Ss304

Weight of Door: ≤150kg

1. 2D adjustable base

2. Ultra-thin design with 18mm thickness

3. Double spring cam shaft

4. 90 degree positioning function

5. Locking force at small angles

6. 360 degree forward and reverse

door opening and closing

7. Suitable for door thickness of more

than 38mm central axis pivot aluminum

frame doors or offset axis pivot doors

主体尺寸: 106x28x18mm

主要材质: 304不锈钢

产品承重: 150KG

1、二维可调节底座

2、18mm厚度超薄设计

3、双弹簧凸轮转轴

4、90度带定位功能

5、小角度有闭锁力

6、可360度正反转开关门

7、适用于门厚38mm以上的

有框中轴或偏轴门



Technical parameters and features

Product model	WF070.100	WF070.120
Material	SS304	SS304
Two-way opening and closing	●	●
Max door width from the axis to the door opening	≤ 750mm	≤ 1000mm
Bottom frame inner width	≥ 38mm	≥ 38mm
Max door weight	100kg	150kg
Max opening angle	360°	360°
90° auxiliary positioning	●	●
Two-stage closing speed regulating valve control	○	○
Closing torque	○	○
● YES ○ NO ■ Optional ※ 500,000 times fatigue test		

Room door fittings

房门配件

Common Door Hinge 普通合页



HYS301



Material: Stainless steel
Size: 3×3×2.5(2BB)
76×76×2.5×D12mm
主要材质: 不锈钢
尺寸: 3×3×2.5(2BB)
76×76×2.5×D12mm

HYS305



Material: Stainless steel
Size: 3.5×3.5×2.5(2BB)
76×76×2.5×D12mm
主要材质: 不锈钢
尺寸: 3.5×3.5×2.5(2BB)
89×89×2.5×D12mm

HYS331



Material: Stainless steel
Size: L(round)
90×65×2.5×D12.3mm
主要材质: 不锈钢
尺寸: L型(圆角)
90×65×2.5×D12.3mm

HYS332



Material: Stainless steel
Size: L(rectangular)
90×70×2.5×D12.3mm
主要材质: 不锈钢
尺寸: L型(直角)
90×70×2.5×D12.3mm

HYS333



Material: Stainless steel
Size: L(round)
90×65×2.5×D12.3mm
主要材质: 不锈钢
尺寸: L型(圆角)
90×65×2.5×D12.3mm

HYS334



Material: Stainless steel
Size: L(round)
90×65×2.5×D12.3mm
主要材质: 不锈钢
尺寸: L型(圆角)
90×65×2.5×D12.3mm

HYS401



Material: Stainless steel
Size: 4×4×3(2BB)
102×102×3.0×D13.5mm
主要材质: 不锈钢
尺寸: 4×4×3(2BB)
102×102×3.0×D13.5mm

HYS402



Material: Stainless steel
Size: 4×4×2.5(2BB)
102×102×2.5×D12.5mm
主要材质: 不锈钢
尺寸: 4×4×2.5(2BB)
102×102×2.5×D12.5mm

HYS403



Material: Stainless steel
Size: 4×4×3(4BB)
102×102×3.0×D14.2mm
主要材质: 不锈钢
尺寸: 4×4×3(4BB)
102×102×3.0×D14.2mm

HYS404



Material: Stainless steel
Size: 4×3×3(4BB)
100×75×2.8×D13mm
主要材质: 不锈钢
尺寸: 4×3×3(4BB)
100×75×2.8×D13mm

Room door fittings

房门配件

Common Door Hinge 普通合页

HYS405



Material: Stainless steel
Size: 4×3×2.3(4BB)
100×75×2.3×D12mm
主要材质: 不锈钢
尺寸: 4×3×2.3(2BB)
100×75×2.3×D12mm

HYS432



Material: Stainless steel
Size: 4×3×3(2BB)
(SS201)100×75×2.85×D13mm
(SS304)102×76×2.95×D14.2mm
主要材质: 不锈钢
尺寸: 4×3×3(2BB)
(SS201)100×75×2.85×D13mm
(SS304)102×76×2.95×D14.2mm

HYS501



Material: Stainless steel
Size: 5×4×3(4BB)
127×102×3.0×D14.5mm
主要材质: 不锈钢
尺寸: 5×4×3(4BB)
127×102×3.0×D14.5mm

HYS503



Material: Stainless steel
Size: 5×3.5×3(4BB)
127×89×3.5×D15mm
主要材质: 不锈钢
尺寸: 5×3.5×3(4BB)
127×89×3.5×D15mm

HYS505



Material: Stainless steel
Size: 5×3×2.3(4BB)
125×75×2.3×D12mm
主要材质: 不锈钢
尺寸: 5×3×2.3(4BB)
125×75×2.3×D12mm

HYS431



Material: Stainless steel
Size: 4×3×3(2BB)
102×72×3.0×D13.5mm
主要材质: 不锈钢
尺寸: 4×3×3(2BB)
102×72×3.0×D13.5mm

HYS441



Material: Stainless steel
Size: 4×3×2.5/3.0/3.5(4BB)
102×102×2.5/3.0/3.5×D12.5/14.5
Finish: AC, AB, SN, GB, MS
主要材质: 不锈钢
尺寸: 4×3×2.5/3.0/3.5(4BB)
102×102×2.5/3.0/3.5×D12.5/14.5
表面处理: 红古铜、青古铜、拉丝钢、拉丝金、砂银

HYS502



Material: Stainless steel
Size: 5×3.5×3(4BB)
127×89×3.0×D14.5mm
主要材质: 不锈钢
尺寸: 5×3.5×3(4BB)
127×89×3.0×D14.5mm

HYS504



Material: Stainless steel
Size: 5×3×3(4BB)
127×76×3.0×D14.5mm
主要材质: 不锈钢
尺寸: 5×3×3(4BB)
127×76×3.0×D14.5mm



More products here

Room door fittings 房门配件



Door stopper series 门吸系列

DX01



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DX03



Material: Stainless steel
Finish: Chrome
主要材质: 不锈钢
表面处理: 镀铬

DX05



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DX07



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DX09



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DX02



Material: Stainless steel
Finish: Chrome
主要材质: 不锈钢
表面处理: 镀铬

DX04



Material: Stainless steel, Zinc alloy
Finish: Chrome
主要材质: 不锈钢, 锌合金
表面处理: 镀铬

DX06



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DX08



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DX10



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

Room door fittings 房门配件

Door stopper series 门吸系列

DX11



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DXS01



Material: Stainless steel
Finish: Chrome
主要材质: 不锈钢
表面处理: 镀铬

DXS03



Material: Stainless steel
Finish: Chrome
主要材质: 不锈钢
表面处理: 镀铬

DX12



Material: Zinc alloy
Finish: Chrome
主要材质: 锌合金
表面处理: 镀铬

DXS02



Material: Stainless steel
Finish: Chrome
主要材质: 不锈钢
表面处理: 镀铬

DXS04



Material: Stainless steel
Finish: Chrome
主要材质: 不锈钢
表面处理: 镀铬



More products here